NEW

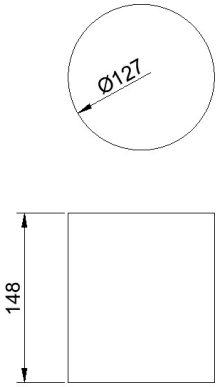

Rode IP65

01 03

- Indoor or outdoor ceiling surface mounted LED luminaire.
- Body made of die cast aluminum.
- Polyester powder coated white or black.
- Clear protection tempered glass and silicone rings ensure IP65 protection in the front of the fixture.
- Based on Bridgelux V13 Gen8, available in CCT 2700/3000/4000K.
- Non dimmable LED driver included.
- Luminaire life time > 50,000 hours at 70% luminous flux.

*This product is only produced upon request (MOQ applied).

CODE	SPEC	9184IP	9186IP
Frequency (Hz)	50/60	50/60	50/60
Main Voltage (V)	220-240	220-240	220-240
Source Power (W)	12,5	17,5	25,3
System Power (W)	13,2	18,4	26,7
Driven @ (mA)	350	500	700
Lumen Source (lm)	1898/1910	2658/2674	3600/3744
Lumen luminaire (lm)	1510/1530	2126/2211	2880/2995
CCT (K)	3000/4000	3000/4000	3000/4000
Beams	50°	50°	50°
CRI	>90	>90	>90
Weight (Kg)	1,10	1,10	1,10